

# F-DRY SERIES HEATLESS REGENERATED ADSORPTION DRYERS

operating pressure	4 to 16 bar
operating temp.range	1,5 to 60 °C
pressure dew points	-40°C (-25°C / -70°C)
flow rate	1200 to 6500 Nm <sup>3</sup> /h

## APPLICATIONS

- compressed air systems

## DESCRIPTION

F-DRY adsorption dryers are designed for continuous separation of water vapour from the compressed air thus reducing the pressure dew point. F-DRY series dryer consists of two columns, filled with desiccant beds, controller with LCD display, valves, manometers, support construction and suitable filter housings with the required filter element. Adsorption takes place under pressure in the first column while the second column regenerates with a portion of already dried compressed air at ambient pressure.

When the first column is saturated to a certain level column switch-over is carried out and the process of adsorption continues in the second column without any drop of pressure at the outlet of the dryer. Regeneration of saturated desiccant is possible because a small portion of already dry compressed air is decompressed and when expanded it becomes extremely dry.

This portion of extremely dry decompressed air also called "purge air" is then fed through the saturated column in the reverse flow direction in order to remove the adsorbed water molecules from the desiccant and release them back to the ambient.






**TECHNICAL DATA**

Type	Connection IN/OUT	Nominal volume flow		Dimensions			Mass
		Inlet <sup>1</sup>	Outlet <sup>2</sup>	A [mm]	B [mm]	C [mm]	
	DN	[Nm <sup>3</sup> /h]	[Nm <sup>3</sup> /h]				kg
<b>F-DRY 1200</b>	DN50	1200	936	1400	600	2050	650
<b>F-DRY 1500</b>	DN65	1500	1170	1500	650	2100	850
<b>F-DRY 2000</b>	DN65	2000	1560	1600	750	2150	950
<b>F-DRY 2500</b>	DN80	2500	1950	1750	800	2250	1100
<b>F-DRY 3000</b>	DN80	3000	2340	1900	850	2250	1500
<b>F-DRY 3750</b>	DN100	3750	2925	2100	950	2350	2000
<b>F-DRY 5000</b>	DN100	5000	3900	2250	1050	2650	2450
<b>F-DRY 6500</b>	DN125	6500	5070	2450	1100	2850	3000

Voltage, frequency	230V, 50/60 Hz
Power consumption	<60 W
Protection class	IP 65
Filter (inlet)*	super fine - 0,01 µm
Filter (outlet)	dust filter; 1 µm
DPD control	optional
Input for stand-by	standard

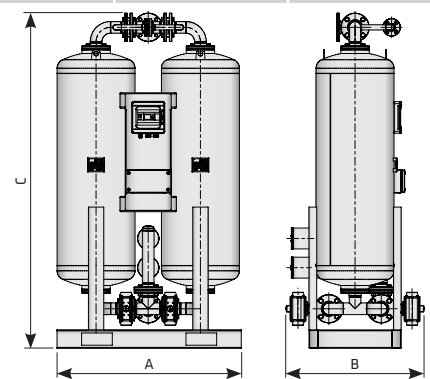

**OPERATING PRESSURE - CORRECTION FACTORS - C<sub>OP</sub>**

Operating pressure [bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Operating pressure [psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
Correction factor C <sub>OP</sub>	0,38	0,5	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

**OPERATING TEMPERATURE - CORRECTION FACTORS - C<sub>OT</sub>**

Operat. temperature [°C]	25	30	35	40	45	50	55	60
Operat. temperature [F]	77	86	95	104	113	122	131	140
Correction factor C <sub>OT</sub>	1	1	1	0,97	0,87	0,80	0,64	0,51

**DEW POINT - CORRECTION FACTORS - C<sub>D</sub>**

Operat. temperature [°C]	-25	-40	-70
Operat. temperature [F]	-13	-40	-94
Correction factor C <sub>D</sub>	1,1	1	0,7

<sup>(1)</sup> Refers to 1bar(a) and 20°C at 7 bar operating pressure, inlet temperature 35°C and pressure dew point at outlet -40°C.

<sup>(2)</sup> Outlet flow refers to typical assumption during regeneration phase for operating at nominal inlet flow conditions. Outlet flow includes average air losses of approximately 17,3 %.

\* If dryer is supplied without inlet filter compressed air class 1 (ISO 8753-1) for solid particles and oil should be provided to the inlet of the dryer.